




: 5 \* % /

8OWUDVRIW 5HFRYHU\ %ULGJH



3, 11, 1\*

3, 1	'(6&5,37,21
	, Q S X V A A Q
	, Q S X V A A Q
	2 X W S X W A Q R G H
	2 X W S X W A W K R G H

) HDWXUHV  
 ‡\* OD V DVVLY D W L S G F W L R Q  
 ‡5HYH U R W D J H 9  
 ‡)RUZ D U G U H Q W  
 ‡+LJ X U & X U U H Q W D E L O L W \\  
 ‡'HVLJ Q R G X U I D R X S S O L F D W L R Q  
 % Q H M L W  
 ‡ & D V H % /  
 ‡ 7 H U P L G R O G H U B B O H 6 7'

0D[LPXP DWL Q Q G O H F W E K B D O F W H U L V W L F V

5DWL Q W V & D P E L M Q W S H U Q Q X U M K H U Z S H F L I L H G  
 6LQJ O H S K D V H K Q U I H Z D V M U Q G X F O R D G H S D F L W E X H U Q R O W H


3DUDPHWHU	6\PEROV	:5*%/	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 5954DU	VH 9ROWDJH		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &RUUHQW			\$
5HYHUVH 5HFRYHU\ 7LPH ,) \$ ,5 \$ ,55 \$	7UU		XV
3HDN )RUZDUG 6XUJH &XUUHQW +DOI 6LQH :DYH 6XSHULPSRV, H G R Q 5DWHG /RDG -('(& 0HWKRG		PV 6LQJOH	\$
, WUDW E O X V L Q B V W P V	, W		\$ 6
0D[LPX)RUZ D U R G W D W H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$	f & f &		\$
7\SLFDO -XQFWLR Q & D V D F L W D Q & M H			S)
2SHUDWLQJ DQG 6WRUDJH 7H P S T W D W X U H 5DQJ H a			f &
1RWH0HDVX D M G + ] D Q G S O L I H Y G H Y U R G H V R D J H &			

:5\*%/ 5HY


:RUOG ,QWH&JQLDMLFLQDHDG

: 5 \* % /


5 \$ 7 , 1 \* 6 \$ 1 ' & + \$ 5 \$ & 7 ( 5 , 6 7 , & 6 & 7 8 5 9 ( 6 X Q O H V V R W K H U Z L V H Q R W H G

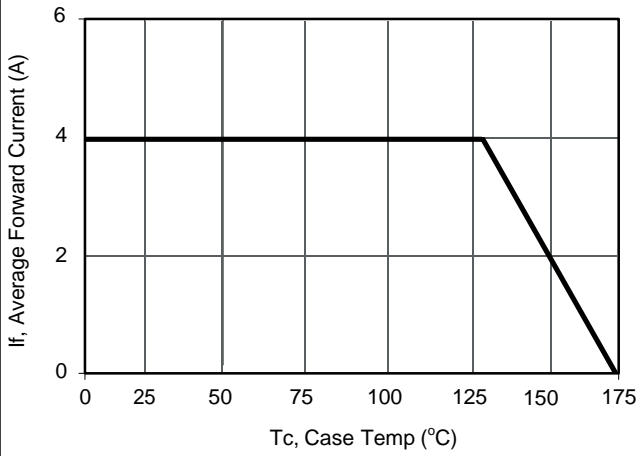

Current Derating, Case

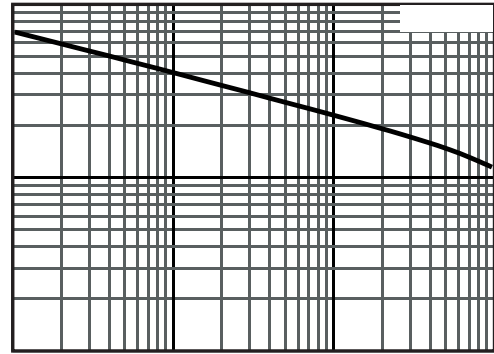

Typical Junction Capacitance

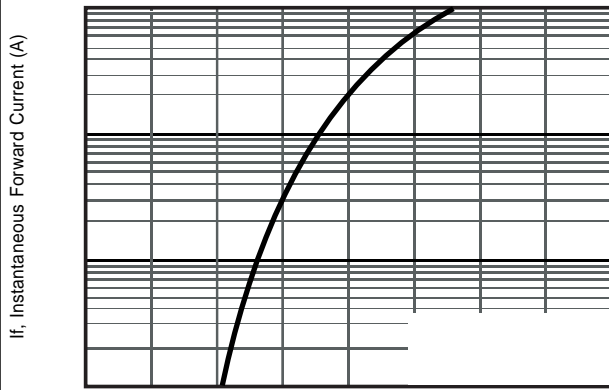

Vf, Instantaneous Forward Voltage (V)

Typical Forward Voltage

50

VR, Reverse Voltage (Volts)

Typical Reverse Current

