



76\$ /

129

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA /



Cathode  Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJKILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUUHQW VLKDDHQZDYH VXSHULPSRQDCHRSRGLRGH		,) 60	15	\$
2SHUDMXQEDVLRQWRUDJH WHPSHUDW		XUH 007CJH	5 WR	f &
7\SLFVCHUPDO USHVUVVHDQFH		'2 \$'	2	f & :
,QVWDQWDQHRROWRDUZDUG SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHOMRQW UDWHYHYURQWDJH	7- f &	,5		P\$
	7- f &			P\$

1RWHV

3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0




76\$ /

129





RATINGS AND CHARACTERISTICS CURVES

7\$

f & X Q O H V Q R W K B U Z L V H

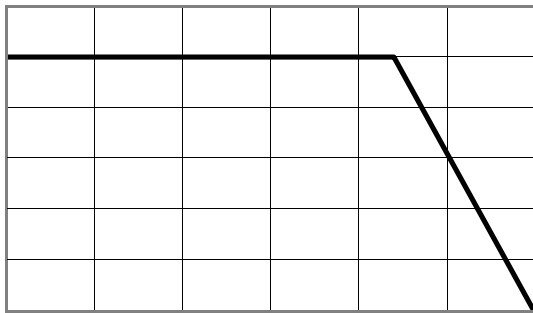


3 H D J R U Z D S X G J & X U U \$ Q W

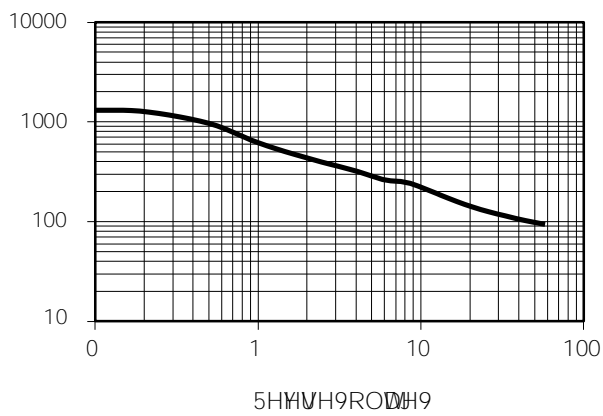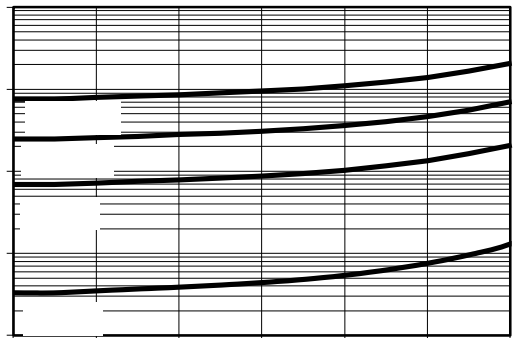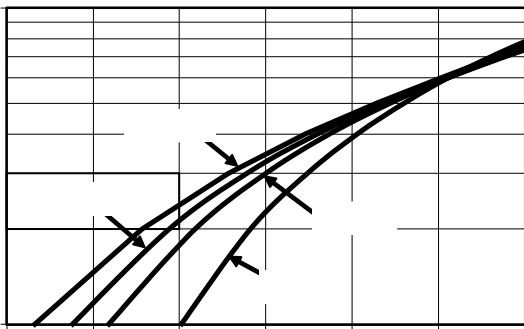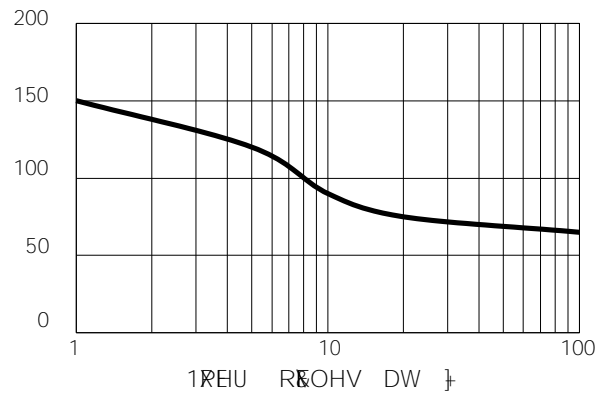

PACKAGE OUTLINE DIMENSIONS

DO-201AD

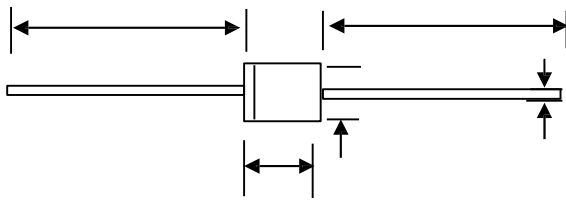

				4	
				1	

