

76\$ /  
OD\

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD  
TSA /



Cathode Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRUZDURQWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGH)HLQLVK &R#6OLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡ )UHHZKH'HLRQJ

Maximum ratings and electrical characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LXPXPHSHVSHUNYHYURQWDJH		9550		9
0D[LXPYPYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDURUHQW VLQDQHQZDYH VXSHULPBRQDURHSHGLRGH		,) 60		\$
2SHUDMXQDQURWRUDJH WHPSHUDW		XUHURQJH	5 WR	f &
7\SLRQCHUPDO USHVULVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRURQWDJH SHGLRGH	,) \$	7- f &	7 < 3	9
	,) \$	7- f &	0\$;	
	,) \$	7- f &		
	,) \$	7- f &		
,QVWDQWDQHRXUUSHQURQW UDWHYHYURQWDJH	7- f &	,5		X\$
	7- f &			P\$

1RWHV


3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0




76\$ / 0D\

RATINGS AND CHARACTERISTICS CURVES 7\$ f & XQOHVQRWKBUZLVH

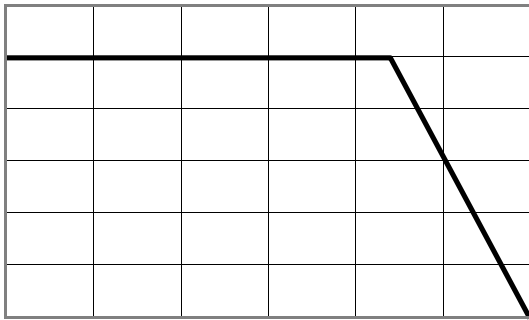


? ? ?

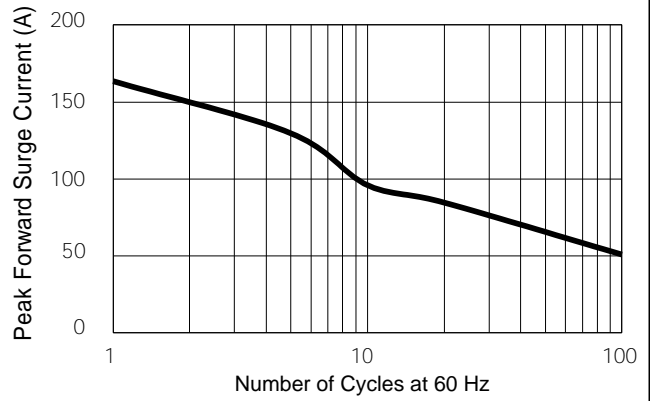


? ? ?



? **CR** ?

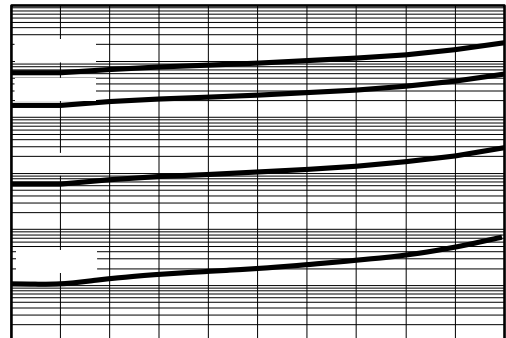


? ?

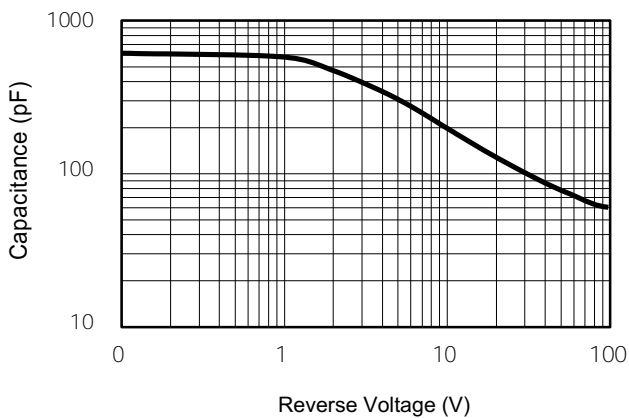

? ?

**PACKAGE OUTLINE DIMENSIONS**


**DO-201AD**

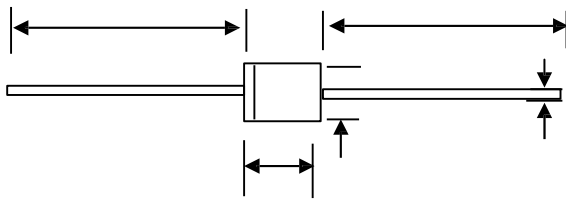

				C	
				1.4	
				1.1	
				55.12	
				39.37	


0DUNLQJ ,QIRUPDWLRQ

&DWKRGH



\$QRGH


73URGXFW P&GHO  
83'& LQIRUPDWLRQ



DWU ] b[ ' =bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl

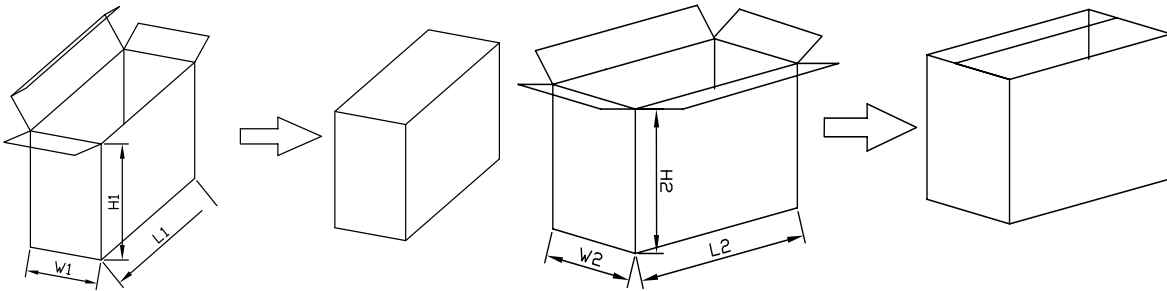

DWU ] b[ ' =bZcf aUh] cb

BC	I B-H	% =bg] XY 6cl			G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+) )	%			