TSR20L45CT
TSR20L45CTF

19-NOV-2013

TO-220AB
TSR20L45CT



ITO-220AB
TSR20L45CTF

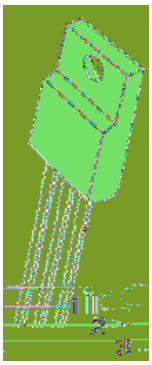



Features

Applications

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

			45		
			20		
			10		
			2		
			40		
		RΘJC			
	3		36		
	3		33		
	1		0.48	0.55	
	1		0.43		
			50	20	
				20	

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

(2) Pulse test: Pulse width ≦ 40 ms

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

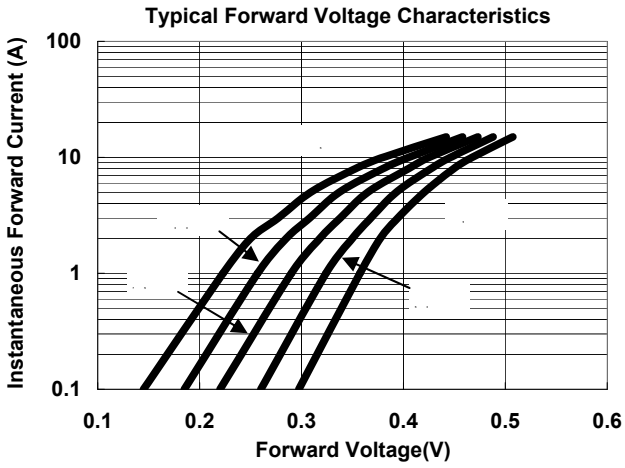

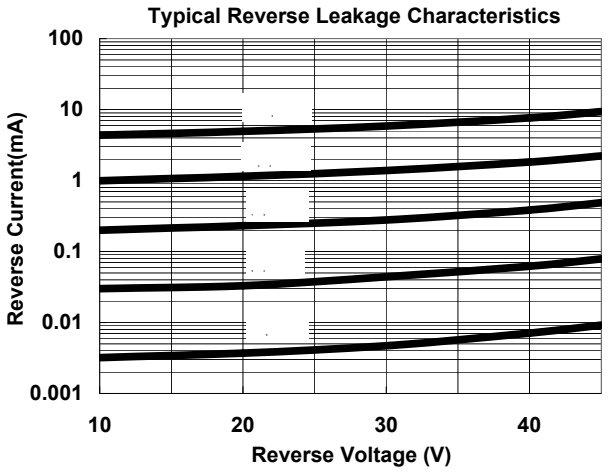

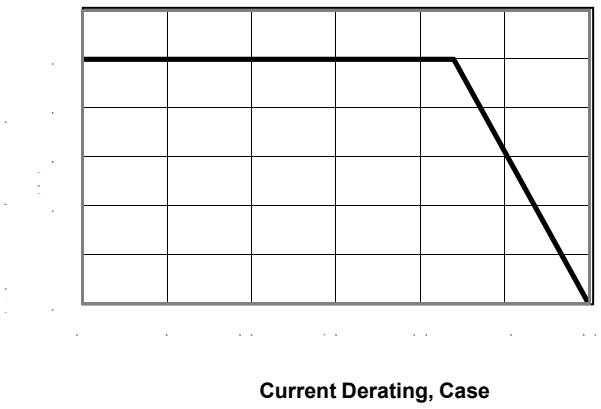

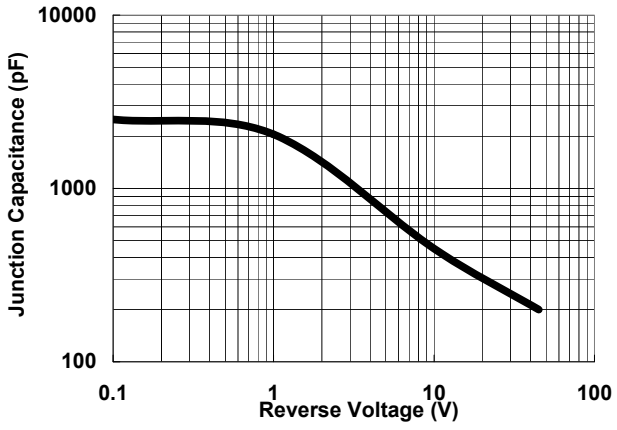

TSR20L45CT
TSR20L45CTF

19-NOV-2013

Marking Information

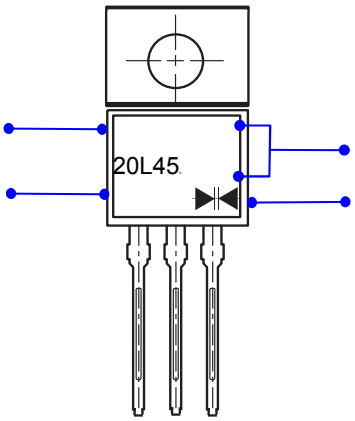

20L45 or TSR20L45CTF



Packaging Information

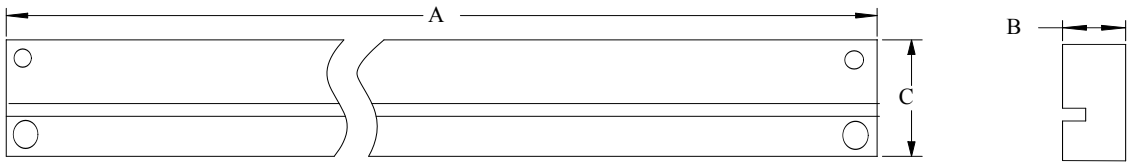

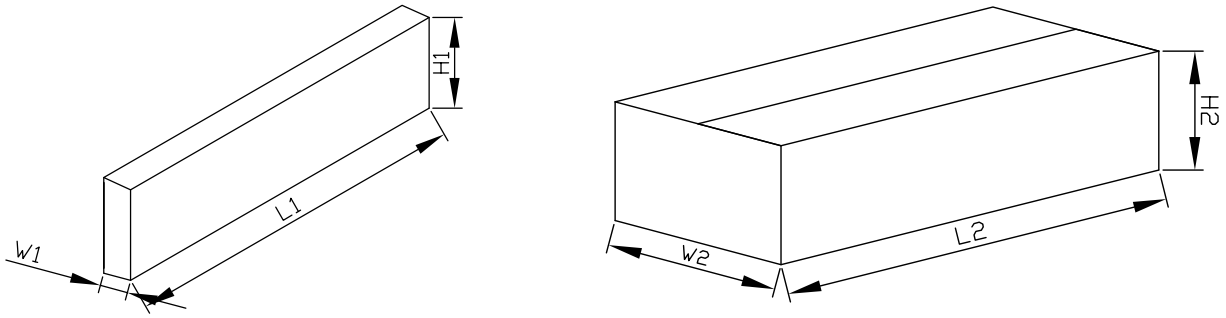

Packaging Information